

UTV and Side-by-Side OBDII Gauge Installation Instructions




Option 1: Single Gauge

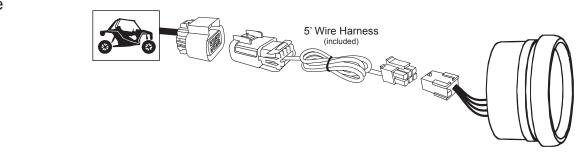

Option 2: Multiple Gauges

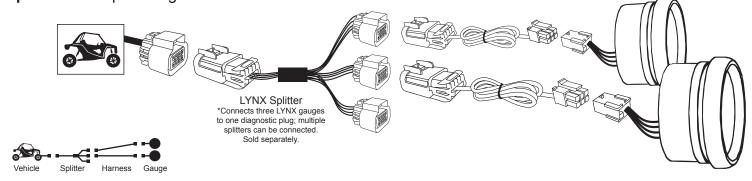


Option 3: Additional Sensored Gauges (ex: oil psi, oil temp)

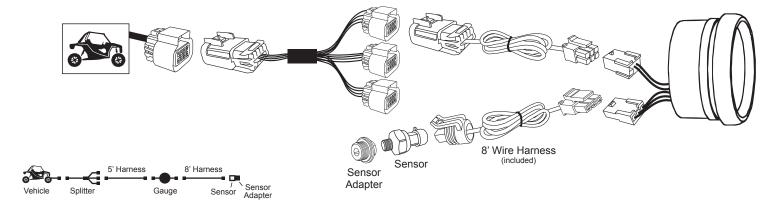

Instructions:

- 1. Mount gauge in desired location.
- 2. Connect included cable to wire harness on back of gauge
- 3. Locate vehicle's diagnostic plug.
- 4. Remove protective cap from diagnostic plug (only on some models).
- 5. Connect gauge harness to diagnostic plug.





Note: LYNX gauges are compatible with Polaris & Can-Am, but for illustration purposes Polaris connectors were used as examples. Can-Am connectors are shown above.

Note: LYNX gauges are not compatible with all vehicles. Questions concerning the compatibility of a LYNX gauge with your vehicle? Contact support@speedhut.com

Customer Support | 801-221-1460 | support@speedhut.com